YML YUANMING LIGHTING

Garage Lighting

YML-1GL53 Series

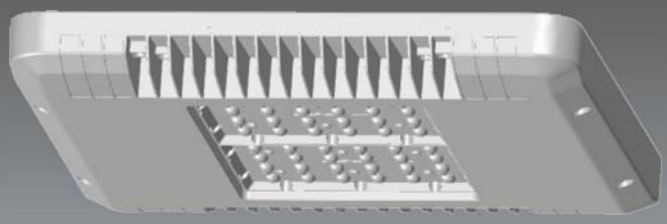

Wireless

Applications

Parking Lots, Garages, Gas Stations, Corridors, Schools, Shopping Malls, etc.

- Efficiency of chips: 150-165 lm/w, 170-180 lm/w
- LENS: Optical grade PC, anti-UV oxidation.
- Beam Angle: Type V
- Housing: die casting aluminum housing with excellent heat dissipation, surface treated with powder coated finish for corrosion and static resistance.
- Input voltage: 100-277 VAC, 50/60 HZ
- LED module can be dismantled separately for maintenance.
- LED driver: constant current, efficiency is up to 92%, PF⩾0.95.
- IP class: IP 65

Dimension[Inch(mm)]

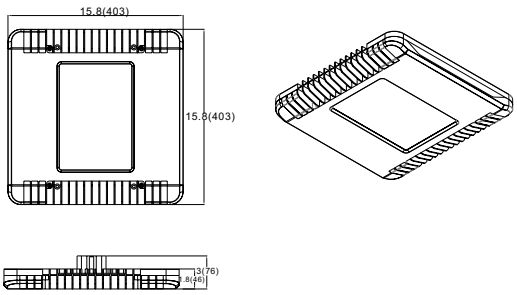

Distribution Curve Flux



Type V

Ordering Information

Example: YML-1GL53-40-750-W-5-1

Company code	Voltage	Type	Power	Ra	Colour Temp.	Colour Options	Optic	Options
YML	**1** 100~277VAC **2** 200~240VAC **3** 100~120VAC **4** 277~480VAC **5** 347~480VAC	**GL 53**	**40** (40W 5200Lumens) **60** (60W 7500Lumens) **80** (80W 9350Lumens) **100** (100W 13500Lumens)	**7** 70 **8** 80 **9** 90	**27** 2700K **30** 3000K **40** 4000K **50** 5000K **57** 5700K **65** 6500K	**W** White(standard)	**5** Type V	**1** 0~10V dimming **2** Timing dimming **3** Occupancy sensor (dimming control/ on off control) **5** Wireless