


Wall Pack Lighting

YML-1WP01G Series

Models passed DLC listed:
YML-1WP01G-80


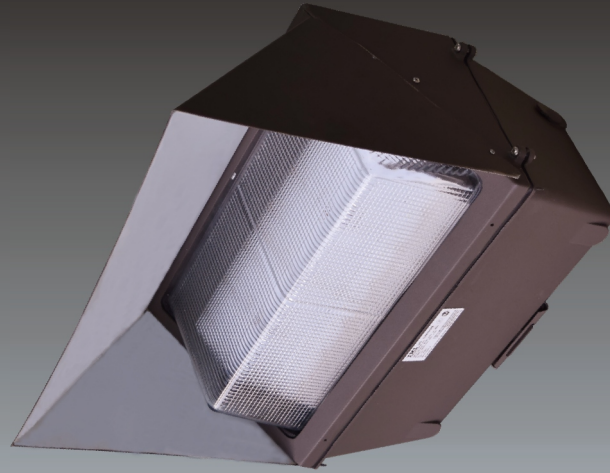


Applications


Parks, Shopping Malls, Courtyards, Historic Areas, etc.

- Efficiency of chips: 150-165 lm/w
- Cover: glass, PC cover is also available.
- Beam Angle: asymmetry distribution
- Housing: die casting aluminum housing with excellent heat dissipation, surface treated with powder coated finish for corrosion and static resistance.
- Input voltage: 120-277 VAC, 50/60HZ
- LED driver: constant current, efficiency is up to 92%, PF ≥ 0.95.
- IP class: IP65

Dimension [Inch(mm)]



Distribution Curve Flux



YML-1WP01G-100-750

Ordering Information

Example: YML-1WP01G-80-750-C-A-1

Company code	Voltage	Type	Power	Ra	Colour Temp.	Colour Options	Optic	Options
YML	1 120~277VAC	WP 01G	80 (80W 6850Lumens) 100 (100W 8200Lumens)	7	27	C	A asymmetry distribution	1 0~10V dimming 5 Wireless
2	200~240VAC			8	30	B		
3	100~120VAC			80	3000K	Black		
4	277~480VAC			9	40	S		
5	347~480VAC			90	4000K	Silver		
					50			
					5000K			
					57			
					5700K			
					65			
					6500K			