

Mounting Mode Options



Fixture

1. High-pressure die cast aluminum housing with powder coated finish for corrosion resistance
2. High-reflection efficiency reflector imported from Germany
3. Separated lamp housing and ballast for longer lifespan
4. Tempered glass cover for shock resistance and durable use
5. Heat-resistance and gas tight rubber seal ensures high IP rating
6. Several options for installation method
7. IP Class: IP65

Lamp and Ballast




1. 150-250W induction lamp with high lumen efficiency, high lumen maintenance, long lifespan and excellent CRI
2. 150-250W electronic ballast with profiled aluminum case, high power factor (>0.96), low energy loss, and long lifespan

Applications


Parking lots, pedestrian walkways, roadways, and other outdoor applications

Warning: Disable all power to the luminaire before conducting any maintenance or upgrade activity. Failure to do so will create a hazardous and fatal working environment.

Distribution Curve Flux

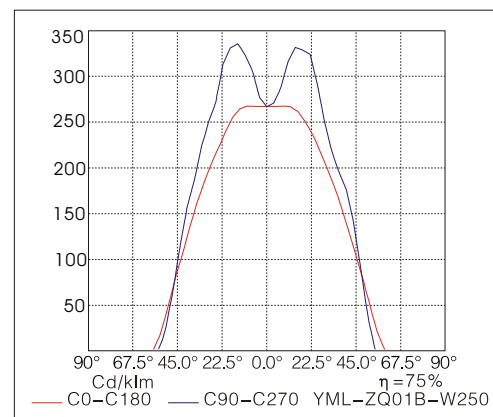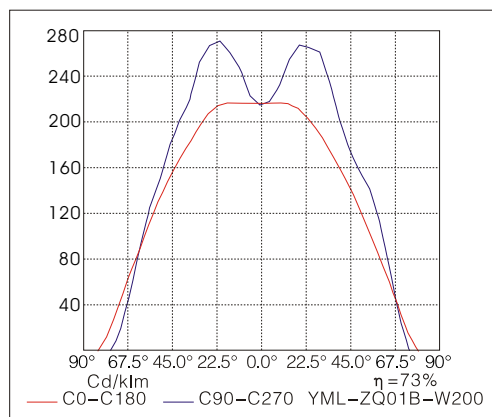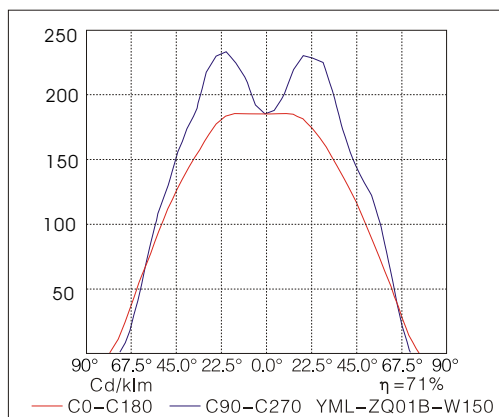

Dimensions [Unit: Inch(mm)]

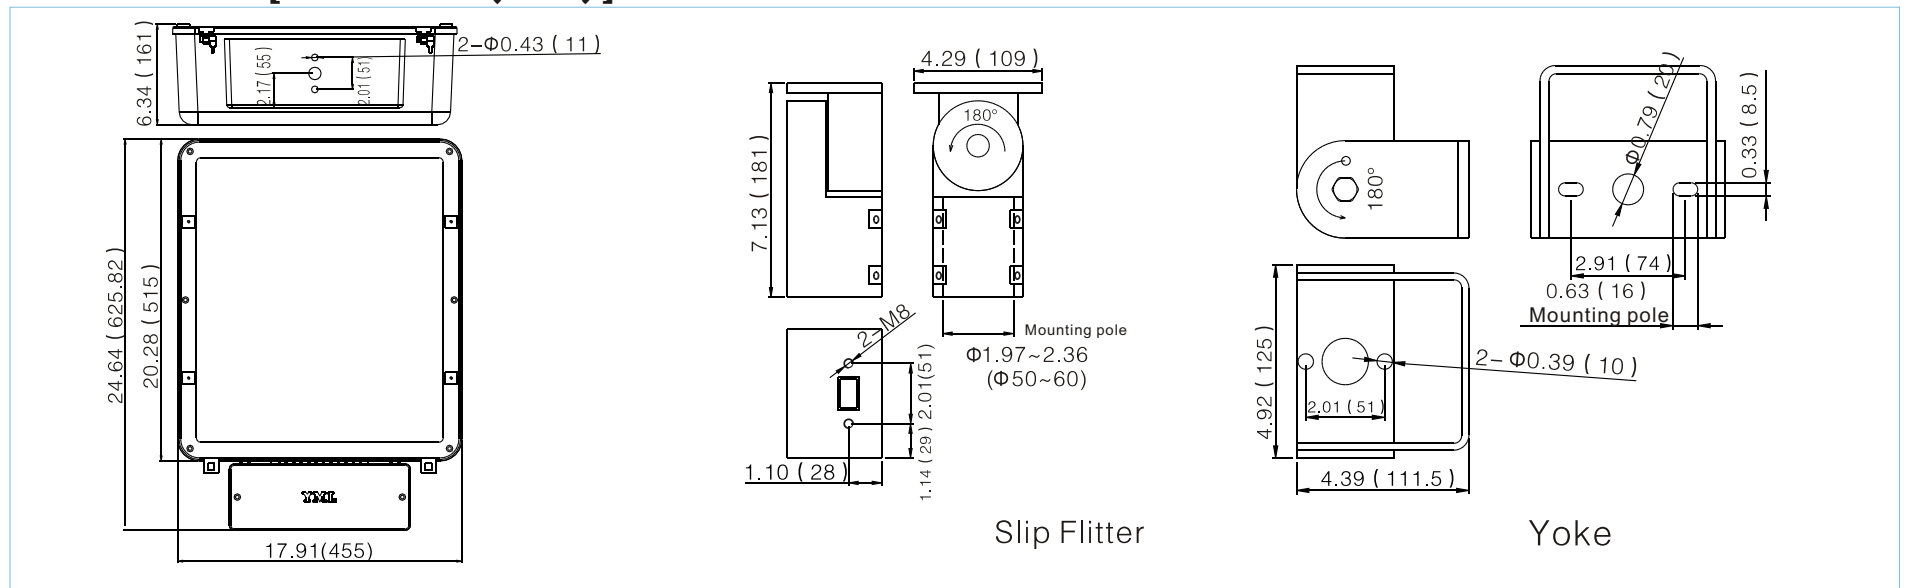

Specifications

Model	Lamp	Wattage (W)	Ballast Loss (W)	Voltage (V)	CCT (K)	Ambient Temperature	Installation	Replace HPS Lamp (W)
YML-ZQ01B/S-W150	WJY150J850W/Z	150	<15	AC:120-277V AC:208-347V	5000	-25 -40°C -13 -104°F	Slip Flitter	250
YML-ZQ01B/S-W200	WJY200J850W/Z	200	<20					400
YML-ZQ01B/S-W250	WJY250H850W/Z	250	<25					400
YML-ZQ01B/Y-W150	WJY150J850W/Z	150	<15				U-Bracket	250
YML-ZQ01B/Y-W200	WJY200J850W/Z	200	<20					400
YML-ZQ01B/Y-W250	WJY250H850W/Z	250	<25					400

Note: The products with CCT 2700-6500K are available upon request