


**ADJUSTABLE DISTRIBUTION INDUCTION LAMP,
40-60W - E26(E27) 80-400W - E39(E40)**



Dimensions [Unit: Inch(mm)]

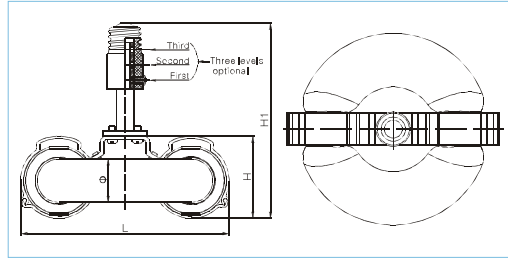


RF 40-60W [Unit: Inch(mm)]

Wattage	Φ	L	H	H1
40W	1.61(41)	6.49(165)	2.54(64.5)	6.50/6.97/7.44
60W	1.61(41)	6.49(165)	2.54(64.5)	165/177/189



Dimensions [Unit: Inch(mm)]

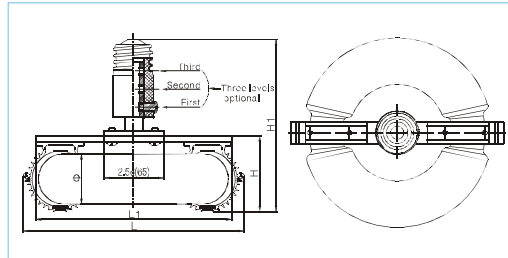

RF 80-400W [Unit: Inch(mm)]

Wattage	Φ	L1	L	H	H1
80	2.12(54)	8.39(213)	9.67(245.5)	3.43(87)	Option 1: 8.62/9.41/10.20 219/239/259
100	2.12(54)	8.39(213)	9.67(245.5)		
120	2.12(54)	10.75(273)	12.04(305.7)		
150	2.12(54)	10.75(273)	12.04(305.7)		
200	2.28(58)	12.40(315)	13.62(346)		
250	2.28(58)	13.35(339)	14.80(376)		
300	2.28(58)	15.16(385)	16.34(415)	Option 2: 10.00/10.97/11.57 254/274/294	
400	2.28(58)	17.48(444)	18.7(475)		11.96/12.75/13.54(304/324/344)

Technical Parameters

Model	Power (W)	Operating Frequency	Pupil Lumens (LM)	Rated Lumens (LM)	Rated Efficiency (lm/W)	CCT	CRI	Lumens Maintenance (56,000hrs)	Average Lifespan (HRS)	Warranty
YML-WJY40H850W41/E26	40	6.50/6.97/7.44	4160-4480	2600-2800	65-70	5000K	≥80	≥70%	100,000	5YRS
YML-WJY60H850W41/E26	60	165/177/189	6720-7200	4200-4500	70-75					
YML-WJY80H850W/E39-01	80	8.62/9.41/10.20 219/239/259	8960-9600	5600-6000	70-75					
YML-WJY100H850W/E39-01	100		11200-12000	7000-7500	75-80					
YML-WJY120H850W/E39-01	120		14400-15360	9000-9600	75-80					
YML-WJY150H850W/E39-01	150		18000-19200	11250-12000	75-80					
YML-WJY200H850W58/E39-01	200	10.00/10.97/11.57 254/274/294	25600-27200	16000-17000	80-85					
YML-WJY250H850W58/E39-01	250		32000-34000	20000-21250	80-85					
YML-WJY300H850W58/E39-01	300		40800-43200	24000-25500	80-85					
YML-WJY300H850W58/E39-02	300		40800-43200	24000-25500	80-85					
YML-WJY300H850W58/E39-02	300	304/324/344	40800-43200	24000-25500	80-85					
YML-WJY300H850W58/E39-03	300		40800-43200	24000-25500	80-85					
YML-WJY400H850W58/E39-03	400		54400-57600	32000-34000	80-85					
YML-WJY80H850W/E39-02	80		8960-9600	5600-6000	70-75					
YML-WJY100H850W/E39-02	100	11200-12000	7000-7500	75-80						
YML-WJY120H850W/E39-02	120	14400-15360	9000-9600	75-80						
YML-WJY150H850W/E39-02	150	18000-19200	11250-12000	75-80						
YML-WJY200H850W58/E39-02	200	25600-27200	16000-17000	80-85						
YML-WJY250H850W58/E39-02	250	32000-34000	20000-21250	80-85						
YML-WJY300H850W58/E39-02	300	40800-43200	24000-25500	80-85						
YML-WJY400H850W58/E39-03	400	54400-57600	32000-34000	80-85						

1. (CCT) :5000K. Products with CCT 2700-6500K are available upon request
2. The lamp must be installed in an enclosed fixture
3. Ambient temperature must be -25~40°C (-13° ~ 104° F)
4. Products for working under ambient temperature of -40~0°C (-40° ~32° F) are available upon request